

1.Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
-12V	18mΩ@-4.5V	-12A
	25mΩ@-2.5V	


2.Features

- TrenchFET Power MOSFET
- Excellent $R_{DS(on)}$ and Low Gate Charge

3.Applications


- DC/DC Converter
- Load Switch for Portable Devices
- Battery Switch

DFNWB2×2-6L



1,2,5,6 :DRAIN
3 :GATE
4 :SOURCE

Schematic diagram



Marking



2333C : Device Code
YY : Year Code
WW : Week Code

4.Absolute Maximum rating ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain - Source Voltage	V_{DS}	-12	V
Gate - Source Voltage	V_{GS}	± 10	V
Continuous Drain Current ^{1,5}	I_D	-12	A
Pulsed Drain Current ²	I_{DM}	-48	A
Power Dissipation ^{4,5}	P_D	3.1	W
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	40	$^\circ\text{C/W}$
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55~ +150	$^\circ\text{C}$







5. Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Static Characteristics						
Drain - Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = -250\mu A$	-12			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -12V, V_{GS} = 0V$			-1	μA
Gate - Body Leakage Current	I_{GSS}	$V_{GS} = \pm 8V, V_{DS} = 0V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\mu A$	-0.4	-0.7	-1	V
Drain-source On-resistance ³	$R_{DS(on)}$	$V_{GS} = -4.5V, I_D = -5A$		18	25	m Ω
		$V_{GS} = -2.5V, I_D = -4.3A$		25	35	
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{DS} = -6V, V_{GS} = 0V, f = 1MHz$		1275		pF
Output Capacitance	C_{oss}			255		
Reverse Transfer Capacitance	C_{rss}			236		
Switching Characteristics						
Total Gate Charge	Q_g	$V_{DS} = -6V, V_{GS} = -4.5V, I_D = -5A$		14		nC
Gate-source Charge	Q_{gs}			2.3		
Gate-drain Charge	Q_{gd}			3.6		
Turn-on Delay Time	$t_{d(on)}$	$V_{DD} = -6V, V_{GEN} = -4.5V, I_D = -4A, R_L = 6\Omega, R_{GEN} = 1\Omega$		26		ns
Turn-on Rise Time	t_r			24		
Turn-off Delay Time	$t_{d(off)}$			45		
Turn-off Fall Time	t_f			20		
Source - Drain Diode Characteristics						
Diode Forward Voltage ³	V_{SD}	$V_{GS} = 0V, I_S = -4A$			-1.2	V


Notes :

1. The maximum current rating is limited by package.
2. Pulse Test : Pulse Width $\leq 10\mu s$, duty cycle $\leq 1\%$.
3. Pulse Test : Pulse Width $\leq 300\mu s$, duty cycle $\leq 2\%$.
4. The power dissipation P_D is limited by $T_{J(MAX)} = 150^\circ\text{C}$.
5. Device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ\text{C}$

6. Typical Characteristic

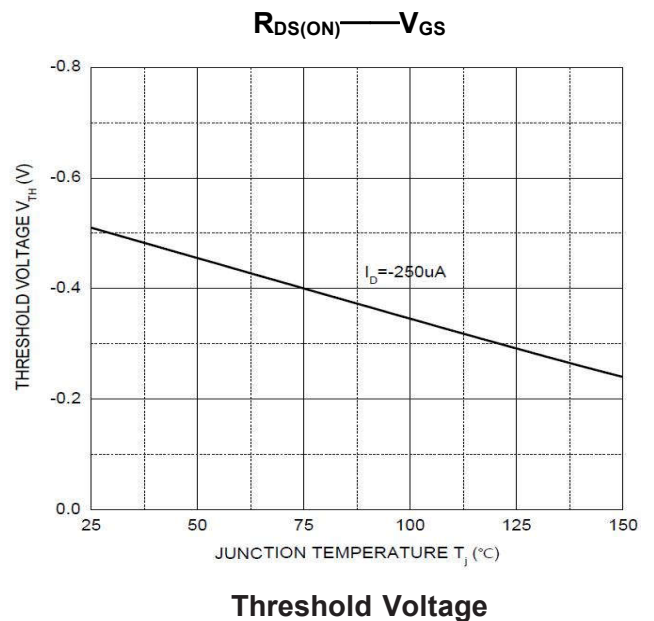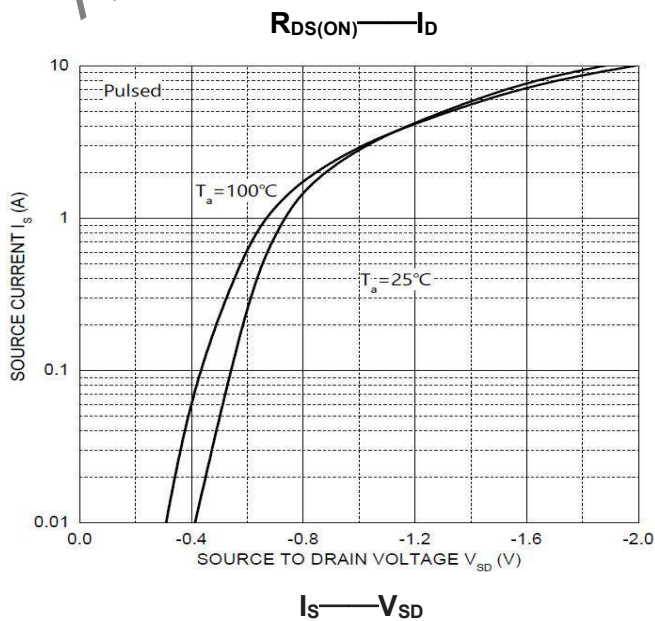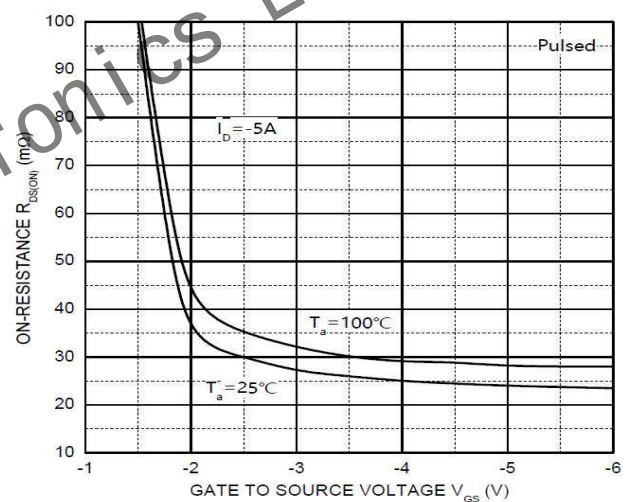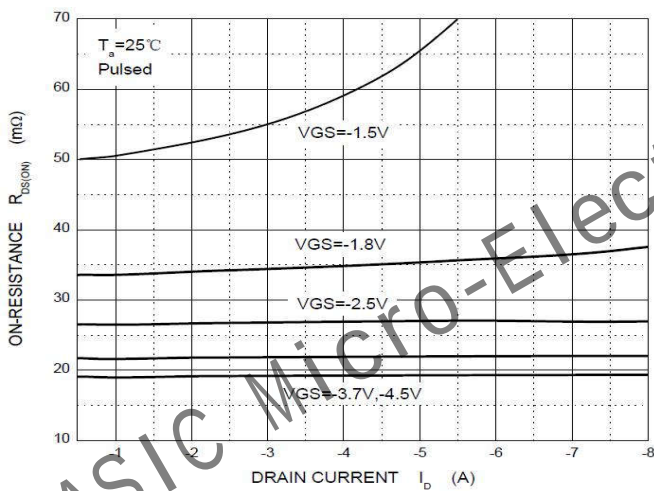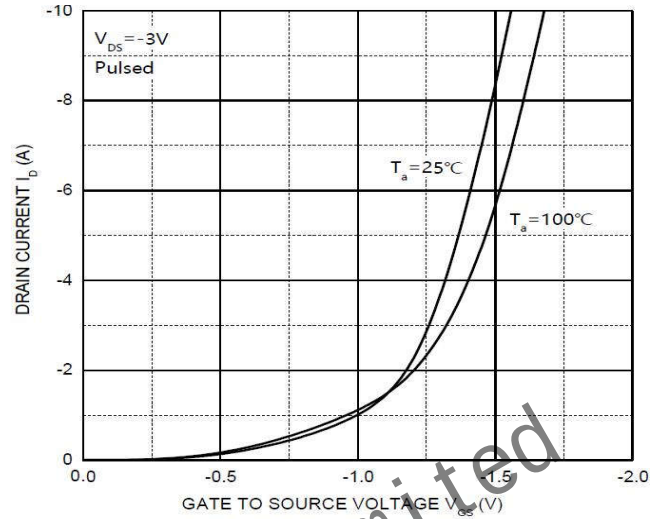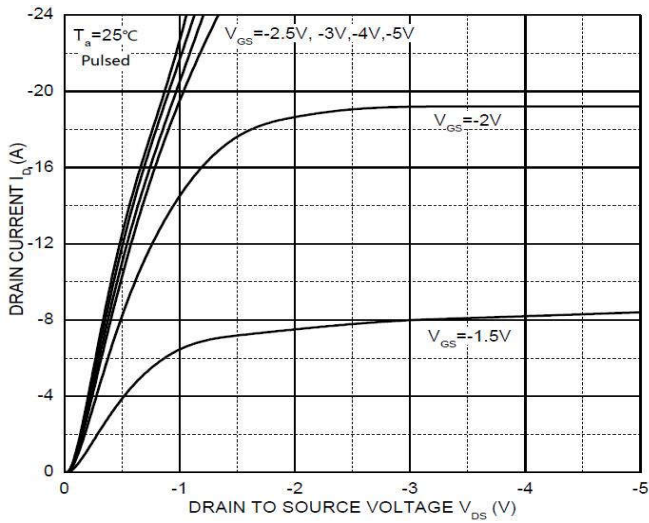


7.Dimension

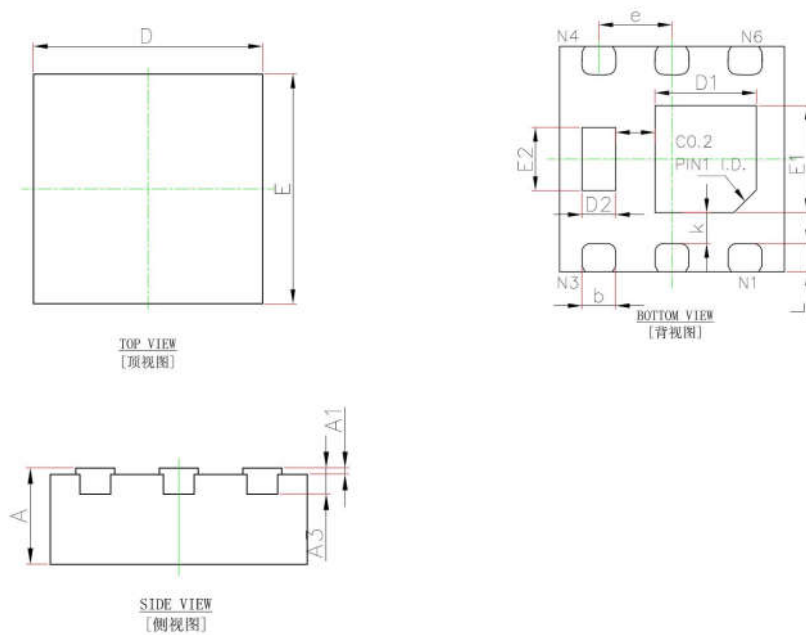

Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A3	0.203REF.		0.008REF.	
D	1.900	2.100	0.075	0.083
E	1.900	2.100	0.075	0.083
D1	0.800	1.000	0.031	0.039
E1	0.850	1.050	0.033	0.041
D2	0.200	0.400	0.008	0.016
E2	0.460	0.660	0.018	0.026
b	0.250	0.350	0.010	0.014
e	0.650BSC.		0.026BSC.	
k	0.275REF.		0.011REF.	
k1	0.350REF.		0.014REF.	
L	0.174	0.326	0.007	0.013

8.Recommended Land Pattern

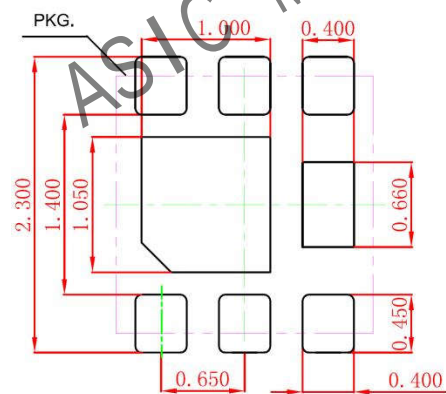


Note:

1. Controlling dimension: in millimeters
2. General tolerance: $\pm 0.05\text{mm}$
3. The pad layout is for reference only
4. Unit: mm

9. Tape and Reel

DFNWB2×2-6L Embossed Carrier Tape

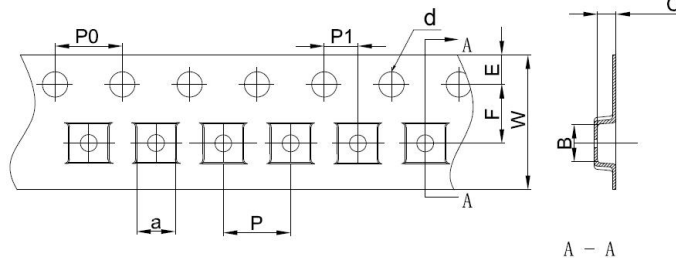


Packaging Description:


SOT-23 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	a	B	C	d	E	F	P0	P	P1	W
DFNWB2×2-6L	2.30	2.30	1.10	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

DFNWB2×2-6L Tape Leader and Trailer

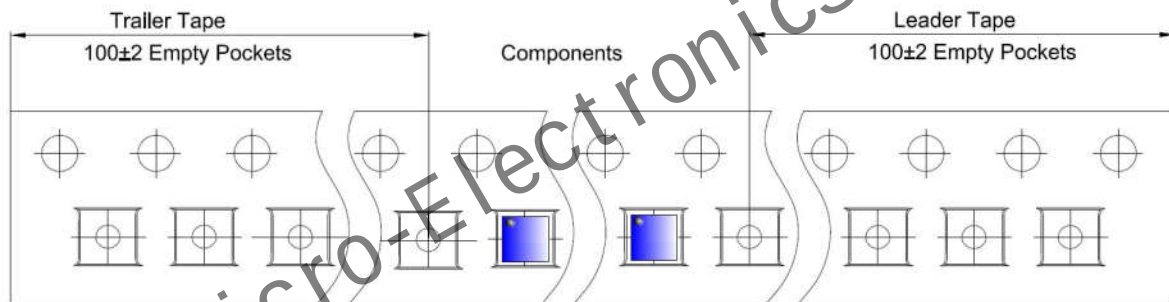

DFNWB2×2-6L Reel

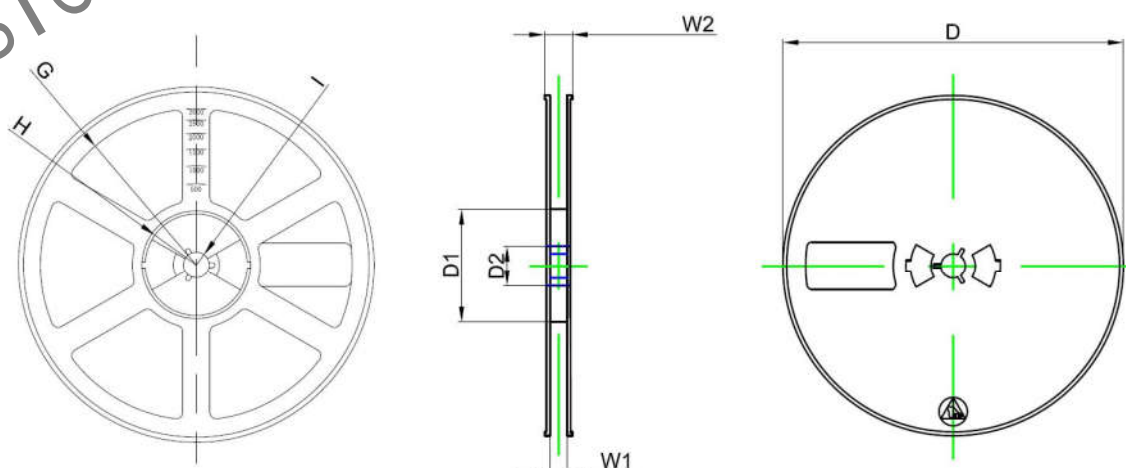

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø180.00	60.00	13.00	R78.00	R25.60	R6.50	9.50	13.10

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	30,000 pcs	203×203×195	120,000 pcs	438×438×220	

DISCLAIMER

ASIC PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with ASIC products. You are solely responsible for

- (1) selecting the appropriate ASIC products for your application,
- (2) designing, validating and testing your application
- (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. ASIC grants you permission to use these resources only for development of an application that uses the ASIC products described in the resource. Other reproduction and display of these resources are prohibited. No license is granted to any other ASIC intellectual property right or to any third party intellectual property right. ASIC disclaims responsibility for, and you will fully indemnify ASIC and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources. ASIC's products are provided subject to ASIC's Terms of Sale or other applicable terms available either on www.asicm.co or provided in conjunction with such ASIC products. ASIC's provision of these resources does not expand or otherwise alter ASIC's applicable warranties or warranty disclaimers for ASIC products

ASIC Micro-Electronics Limited